




Diesel generator set QSK60 series engine

1600 kVA – 2500 kVA 50 Hz
1825 kW – 2250 kW 60 Hz

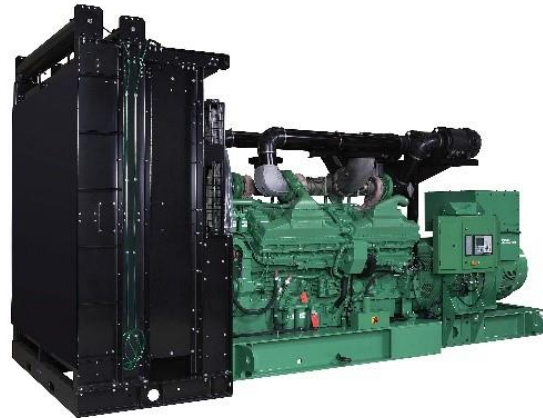

Description

This Cummins® commercial generator set is a fully integrated power generation system, providing optimum performance, reliability, and versatility for stationary Standby, Prime Power, and Continuous duty applications.

Features

Cummins heavy-duty engine - Rugged 4-cycle industrial diesel delivers reliable power, low emissions and fast response to load changes.

Permanent Magnet Generator (PMG) - Offers enhanced motor starting and fault clearing short circuit capability.

Alternator - Several alternator sizes offer selectable motor starting capability with low reactance 2/3 pitch windings; low waveform distortion with non-linear loads, fault clearing short-circuits capability, and class F or H insulation.

Control system - The PowerCommand® electronic control is standard equipment and provides total genset system integration including automatic remote starting/stopping, precise frequency and voltage regulation, alarm and status message display, AmpSentry™ protection, output metering, auto-shutdown at fault detection and NFPA 110 Level 1 compliance.

Cooling system - Standard integral set-mounted radiator system, designed and tested for rated ambient temperatures, simplifies facility design requirements for rejected heat.

NFPA - The genset accepts full rated load in a single step in accordance with NFPA 110 for Level 1 systems.

Warranty and service - Backed by a comprehensive warranty and worldwide distributor network.

ISO8528-5 - Refer to factory for site and configuration specific transient performance classification.

Model	Standby rating		Prime rating		Emissions compliance	Data sheets	
	50 Hz kVA (kW)	60 Hz kW (kVA)	50 Hz kVA (kW)	60 Hz kW (kVA)		50 Hz	60 Hz
C1760 D5e	1760 (1408)		1600 (1280)		*<2000 mg NOx Emitter	DS49-CPGK	
C2000 D5	2063 (1650)		1875 (1500)			DS48-CPGK	
C2000 D5e	2000 (1600)		1825 (1460)		*<2000 mg NOx Emitter	DS50-CPGK	
C2250 D5	2250 (1800)		2000 (1600)			DS52-CPGK	
C2500 D5A	2500 (2000)		2250 (1800)			DS53-CPGK	
C2000 D6		2000 (2500)		1825 (2281)			DS86-CPGK
C2250 D6A		2250 (2813)					DS87-CPGK

<2000 mg NOx Emitter

Generator set specifications

Performance Class	Genset models have been tested in accordance with ISO 8528-5. Consult factory for transient performance information.
Voltage regulation, No load to full load	± 0.5%
Random voltage variation	± 0.5%
Frequency regulation	Isochronous
Random frequency variation	± 0.25%
Electromagnetic Compatibility Performance	Emissions to EN 61000-6-2:2005 Immunity to EN 61000-6-4:2007+A1:2011 *Complies with ICES-002 *Complies with FCC Part 15 Class B

*Applies only to certain models

Engine specifications

Design	4 cycle, V-black, turbocharged and low temperature after-cooled
Bore	158.8 mm (6.25 in)
Stroke	190.0 mm (7.48 in)
Displacement	60.2 L (3673 in ³)
Cylinder block	Cast iron, 60° V 16 cylinder
Battery capacity	2200 amps at ambient temperature 0 °F to 32 °F (0 °C)
Battery charging alternator	40 amps
Starting voltage	24 volts, negative ground
Fuel system	Direct injection
Fuel filter	Triple element, spin on fuel filters with water separator
Air cleaner type	Dry replaceable element
Lube oil filter type(s)	Four spin-on, combination full flow and bypass filters
Standard cooling system	104 °F (40 °C) ambient radiator

Alternator specifications

Design	Brushless, 4 pole, drip-proof revolving field
Stator	2/3 pitch
Rotor	Direct coupled by flexible disc
Insulation system	Class H
Standard temperature rise	150 °C Standby
Exciter type	Permanent Magnet Generator (PMG)
Phase rotation	A (U), B (V), C (W)
Alternator cooling	Direct drive centrifugal blower fan
AC waveform Total Harmonic Distortion (THDV)	No load < 1.5%. Non distorting balanced linear load < 5%

Available voltages

50 Hz Line – Neutral/Line – Line

- 220/380
- 230/400
- 240/415
- 254/440
- 1905/3300
- 3640/6300
- 3810/6600
- 6350/11000

60 Hz Line – Neutral/Line – Line

- 219/380
- 254/440
- 277/480
- 347/600
- 2400/4160
- 7200/12470
- 7620/13200
- 7970/13800

Note: Consult factory for other voltages.

Generator set options

Engine

- 208/240/480 V thermo-statically controlled coolant heater for ambient above and below 4.5 °C (40 °F)
- Oil drain pump – manual
- Engine toolkit
- Heavy duty air filter
- Oil Level regulator (REN Valve)
- Remote duplex filter

Exhaust system (continued)

- Residential grade exhaust silencer – shipped loose
- Side entry silencer

Control panel

- Multiple language support
- Right or left facing mounting
- Floor mounted

Control panel (continued)

- Masterless load demand
- Warning high bearing temperature
- Alternator temperature monitoring
- Exhaust gas temperature monitoring
- 6x user-configurable relays
- 120/240 V Heater control cabinet
- Mechanical hour meter
- 2x digital input/output

Our energy working for you.™

©2020 Cummins Inc. | SS17-CPGK (QSK60HPI) (08/22)

cummins.com

Exhaust system

- None supplied

- 3 phase differential CTs (3x or 6x CTs)

Generator set options (continued)**Alternator**

- 120, 240 or 110/240 V control anti-condensation heater
- Stator winding temp sensor 2 RTDs/phase
- Bearing temp sensor RTDs
- 1 or 2 hole lug output terminal
- Cable entrance box set mounted top or bottom entry
- Cable entrance box left or right mounting

Generator set

- 5 A or 10 A batteries
- Standalone or wall mountable battery charger
- Manual available in multiple languages
- Standard spring mounts
- Oil sampling valve
- Fuel transfer pump hand or electric
- Free standing, single wall fuel tank 1350 L/356 US Gal
- Oil make up system

Cooling system

- Remote radiator
- 50 °C (122 °F) radiator
- Slip fit connection
- Flanged (ASA) connection
- Enhanced environmental protection for C2500 D5A

Note: Some options may not be available on all models - consult factory for availability

PowerCommand 3.3 – control system



Control system

The PowerCommand control system is an integrated microprocessor based generator set control system providing voltage regulation, engine protection, alternator protection, operator interface and isochronous governing.

AmpSentry – Includes integral AmpSentry protection, which provides a full range of alternator protection functions that are matched to the alternator provided.

Power management – Control function provides battery monitoring and testing features and smart starting control system.

Advanced control methodology – Three phase sensing, full wave rectified voltage regulation, with a PWM output for stable operation with all load types.

Communications interface – Control comes standard with PCCNet and Modbus interface.

Service - InPower™ PC-based service tool available for detailed diagnostics, setup, data logging and fault simulation.

Reliable design – The control system is designed for reliable operation in harsh environment.

Multi-language support

Operator panel features

Operator panel features – The operator panel, in addition to the alternator, displays the Utility/AC Bus data.

Operator/display functions

- 320 x 240 pixels graphic LED backlight LCD
- Auto, manual, start, stop, fault reset and lamp test/panel lamp switches
- Alpha-numeric display with pushbuttons
- LED lamps indicating genset running, remote start, not in auto, common shutdown, common warning, manual run mode, auto mode and stop

Paralleling control functions

- Digital frequency synchronization and voltage matching
- Isochronous kW and kVar load sharing controls
- Droop kW and kVar control
- Sync check
- Extended paralleling (Peak Shave/Base Load)

- Digital power transfer control (AMF) provides load transfer operation in open or closed transition or soft (ramping) transfer mode

Alternator data

- Line-to-Neutral and Line-to-Line AC volts
- 3-phase AC current
- Frequency
- kW, kVar, power factor kVA (three phase and total)

Engine data

- DC voltage
- Engine speed
- Lube oil pressure and temperature
- Coolant temperature
- Comprehensive FAE data (where applicable)

Other data

- Genset model data
- Start attempts, starts, running hours, kW hours
- Load profile (operating hours at % load in 5% increments)
- Fault history
- Data logging and fault simulation (requires InPower)

Standard control functions

Digital governing (optional)

- Integrated digital electronic isochronous governor
- Temperature dynamic governing

Digital voltage regulation

- Integrated digital electronic voltage regulator
- 3-phase, 4-wire Line-to-Line sensing
- Configurable torque matching

AmpSentry AC protection

- AmpSentry protective relay
- Over current and short circuit shutdown
- Over current warning
- Single and three phase fault regulation
- Over and under voltage shutdown
- Over and under frequency shutdown
- Overload warning with alarm contact
- Reverse power and reverse Var shutdown
- Field overload

Engine protection

- Battery voltage monitoring, protection and testing
- Over speed shutdown
- Low oil pressure warning and shutdown
- High coolant temperature warning and shutdown
- Low coolant level warning or shutdown
- Low coolant temperature warning
- Fail to start (over crank) shutdown
- Fail to crank shutdown
- Cranking lockout
- Sensor failure indication
- Low fuel level warning or shutdown

Standard control functions (continued)

Engine protection

- Fuel-in-rupture-basin warning or shutdown
- Full authority electronic engine protection

Control functions

- Time delay start and cool down
- Real time clock for fault and event time stamping

Ratings Definitions

Emergency Standby Power (ESP):

Applicable for supplying power continuously to varying electrical loads for the duration of power interruption of a reliable utility source. Emergency Standby Power (ESP) is in accordance with ISO 8528 and ISO 3046-1, obtained and corrected in accordance with ISO 15550).

Limited-Time Running Power (LTP):

Applicable for supplying power to a constant electrical load for limited hours. Limited-Time Running Power (LTP) is in accordance with ISO 8528.

Prime Power (PRP):

Applicable for supplying power to varying electrical load for unlimited hours. Prime Power (PRP) is in accordance with ISO 8528. Ten percent overload capability is available in accordance with ISO 3046-1. Data shown above represents gross engine performance and capabilities as per ISO 3046-1, obtained and corrected in accordance with ISO 15550.


Base Load (Continuous) Power (COP):

Applicable for supplying power continuously to a constant load up to the full output rating for unlimited hours. No sustained overload capability is available for this rating. Consult authorized distributor for rating. (Equivalent to Continuous Power in accordance with ISO 8528 and ISO 3046-1, obtained and corrected in accordance with ISO 15550).

- Exerciser clock and time of day start/stop
- Data logging
- Cycle cranking
- Load shed
- Configurable inputs and outputs (4)
- Remote emergency stop

Options

- Auxiliary output relays (2)

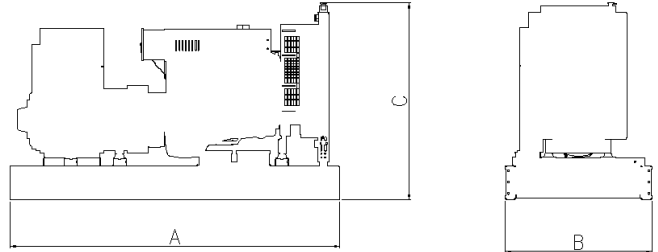

This outline drawing is to provide representative configuration details for model series only.

See respective model data sheet for specific model outline drawing number.

Do not use for installation design

Model	Dim 'A' (mm)	Dim 'B' (mm)	Dim 'C' (mm)	Set weight dry* (kg)	Set weight wet* (kg)
C1760 D5e	6175	2494	3422	14825	16040
C2000 D5	6175	2286	2537	14880	15945
C2000 D5e	6175	2494	3422	15345	16560
C2250 D5	6175	2286	2537	15095	16160
C2500 D5A	6175	2494	3201	16840	17990
C2000 D6	6175	2286	2537	14880	15945
C2250D6A	6175	2494	3201	15380	16530

* Note: Weights represent a set with standard features. See outline drawings for weights of other configurations.

See your distributor for more information.

Cummins Power Generation
 Manston Park, Columbus Avenue
 Manston, Ramsgate
 Kent CT12 5BF, UK
 Telephone: +44 (0) 1843 255000
 Fax: +44 (0) 1843 255902
 E-mail: cpg.uk@cummins.com
 Web: power.cummins.com

Our energy working for you.™

©2020 Cummins Inc. All rights reserved. Cummins is a registered trademark of Cummins Inc. PowerCommand, AmpSentry, InPower and "Our energy working for you." are trademarks of Cummins Inc. Other company, product, or service names may be trademarks or service marks of others. Specifications are subject to change without notice. SS17-CPGK (QSK60HPI) (08/22)



cummins.com

Codes and Standards

<p>ISO 9001 ISO 14001 ISO 45001</p>	<p>This product was manufactured in a facility whose quality management system is certified to ISO 9001 and its Health Safety Environmental Management Systems certified to ISO 14001 and ISO 45001.</p>	<p>2000/14/EC</p>	<p>All enclosed products are designed to meet EU Noise Directive 2000/14/EC</p>
<p>CE</p>	<p>The CE marking is only valid when equipment is used in a fixed installation application. Material compliance declaration is available upon request.</p>	<p>ISO 8528</p>	<p>This generator set has been designed to comply with ISO 8528 standards.</p>
<p>UK CA</p>	<p>The UKCA marking is only valid when equipment is used in a fixed installation application. Material compliance declaration is available upon request.</p>	<p>International Building Code</p>	<p>The generator set package is available certified for seismic application in accordance with International Building Code.</p>

For more information contact your local Cummins distributor or visit power.cummins.com

Our energy working for you.™

