

Commercial Generator Set Quiet Diesel™ Series QD 5000



Cummins Onan



Performance you rely on.™

Features and Benefits

Lower noise, vibration, harshness (NVH)

Up to 15 dB(A) quieter than conventional diesel generator sets

Enclosed muffler for added quietness, easy installation

Automatic glow plug eliminates preheat time uncertainty

Self-diagnostic capability simplifies troubleshooting

Convenient, top-mounted switches and coolant level check/fills

Complete, integrated package for easy, low-cost installation

Service and maintenance points accessible through easy-latch side service door

Weight, Size and Sound level

Weight: 400 lb (181 kg), wet

Size: Length 34.5 in (876.0 mm), width 22.9 in (581.2 mm), height 20.3 in (514.7 mm)

Sound: 68 dB(A) at 10 ft (3 m), before installation, 1/2 load

Models and Ratings

Model	Fan	Hz	Watts	Voltage	Amps	PF	Phase	Circuit breaker
5 HDKBC/2860	Internal	60	5000	120	41.7	1.0	1	(1) 2 pole, 25 A
5 HDKBC/2861	Internal	60	5000	120/240	41.7/20.8	1.0	1	(1) 2 pole, 25 A
5 HDKBC/2905	Internal	60	5000	120/240	12.0	1.0	3	(1) 3 pole, 15 A
5 HDKBB/6880	Internal	50	4800	230	21	1.0	1	(1) 2 pole*, 25 A

- Ratings apply to altitudes up to 500 ft (152.4 m), 85 °F (29 °C) ambient* with No. 2 diesel fuel.
- Maximum power capability decreases 3.5% for each 1,000 ft (305 m) above 500 ft (152.4 m) and 1% for each 10 °F (5.5 °C) increase in ambient* temperature above 85 °F (29 °C).
- Ratings are intermittent power output.
- All 60 Hz and 50 Hz models operate at 2880 r/min.

* Ambient is defined as the air temperature measured at the cooling air inlet to the set.

* Only one pole is used.

Standard Features

2-cylinder diesel engine
 Brush type alternator
 Digital voltage regulation, no adjustments required Bottom and side air inlet and outlet
 Integral enclosed muffler with stationary exhaust pipe connection point
 USDA approved spark arrestor
 Internal radiator
 Intake silencer
 Replaceable dry element air cleaner
 Maintenance-free electronic governor
 Fused DC circuits
 Battery charging - 4 A
 Hour meter
 Waterproof connector for remote operation
 Focalized mounting system with 3-point vibration isolation
 Over voltage, low oil pressure, over temp, over speed and overload safeties
 Bulkhead type connections for fuel and battery
 Terminal block connection for AC output
 Electric fuel pump
 Fuel filter
 Full flow oil filter
 Service and maintenance from below or side service access panel
 Automatic timed glow plugs for quick easy start Instant one-touch stop

Engine Details

Model: Kubota Z482
Design: 4-cycle, liquid-cooled diesel engine
Cylinders: 2, inline vertical
Bore: 2.64 in (67 mm)
Stroke: 2.68 in (68 mm)
Displacement: 29.23 in³ (479 cm³)
Compression ratio: 23:1
Lube oil capacity: 2.0 qt (1.9 L)
Cooling system capacity: 3.0 qt (2.84 L)
Power (max): At 3000 rpm: 11.1 hp (8.3 kW) SAE net intermittent
Starting system: Remote, 12 V

Average Fuel Consumption:

No. 2 diesel fuel, Gal/hr (L/hr)	No load		Half load		Full load	
5 HDKBC	0.25	(0.95)	0.39	(1.47)	0.60	(2.27)
5 HDKBB	0.20	(0.74)	0.32	(1.23)	0.54	(2.04)

Alternator Details

Design: Cummins Onan, revolving field, AC, 2-pole
Insulation System and Temperature Rise: Class H
Exciter System: Capped, digital voltage regulation
DC Brushes: Electrographic; long life
Bearings: Double-sealed pre-lubricated ball bearings
Cooling: Direct drive centrifugal blower

Generator Set Details

Control

- Microprocessor control
- Integrated generator set and engine control
- User and service personnel accessible diagnostics
- Fused DC circuits
- Over voltage safety
- Hour meter
- Low oil pressure safety
- Over speed safety
- Overload safety
- Automatic timed glow plugs based on ambient temperature
- One-touch stop

Frequency Regulation

No load/Full load

+/- 5%

Constant load

+/- 1%

Voltage Regulation


No load/Full load

+/- 1%

Constant load

+/- 2%

Basic Dimensions

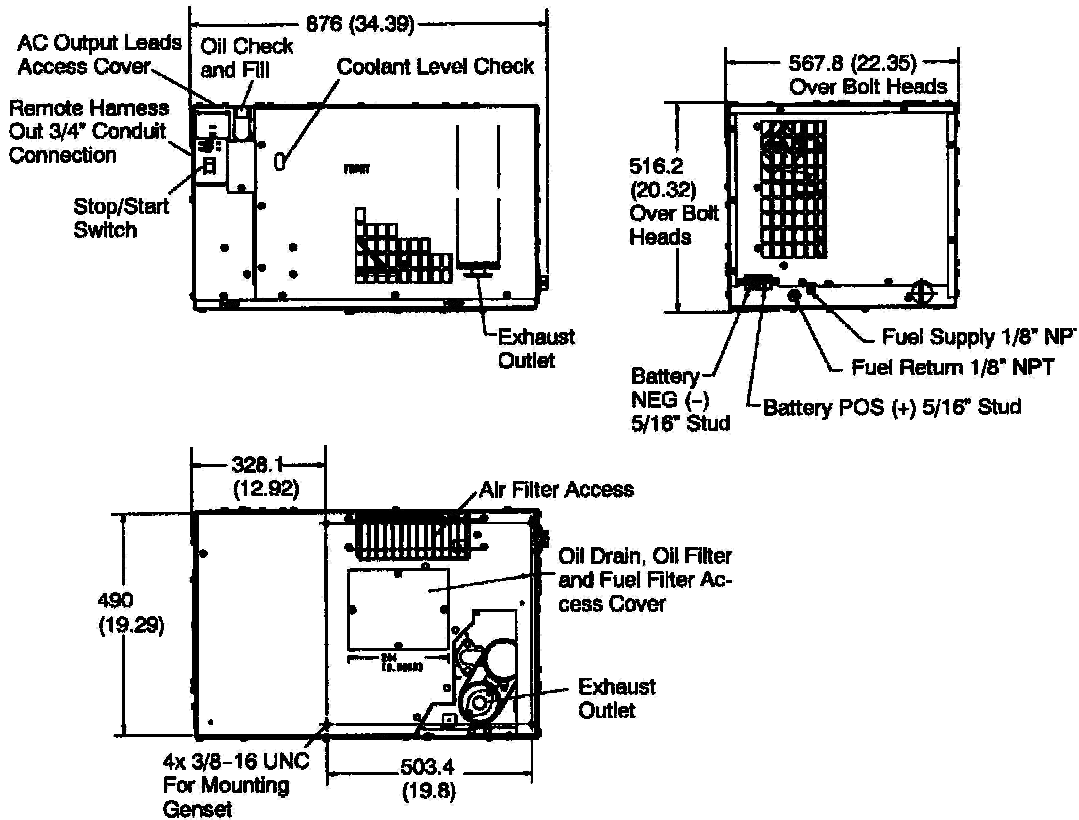

Note: This outline drawing is provided for general reference only and is not intended for design or installation. For more information see Operation and Installation manuals or obtain drawing 500-3634 and wiring diagram from your distributor/dealer.

Options and Accessories

- Auxiliary fuel pump kit (P/N 541-0530)
- Remote control panels
 - Switch only (P/N 300-4942)
 - Switch and hour meter (P/N 300-4943)
 - Switch and DC voltmeter (P/N 300-4944)

- Remote harnesses (for use with remote panels):
 - 10 ft (P/N 338-3490-01), 30 ft (P/N 338-3490-02)
- Remote control harness pigtail (P/N 300-4947)
- Remote control harness pigtail at panel (P/N 338-3573)
- Exhaust adapter, 7 in (P/N 155-2424), 3 in (P/N 155-2610)
- Exhaust elbow, 90° (P/N 155-2982)

Testing and Standards

- Tested at extremes of temperature -20 °F (-29 °C) to 120 °F (49 °C) for starting and operation
- Tested with commercial loads
- Tested in high humidity conditions
- Tested in salt spray conditions
- Tested in heavy airborne dust conditions
- Field test program
- This product meets U.S. EPA Tier IV
- This generator set was designed and manufactured in facilities certified to ISO 9001
- 60 Hz models are CSA certified for CSA C22.2 std 100 and std 14
- 50 Hz models are CE certified. CE certification subject to EU RoHS exclusion per EU 2011/65



Warranty Policy

The Cummins Onan limited warranty covers virtually everything except routine maintenance for the first two years you own your generator set, or the first 2,000 hours of operation, whichever comes first. In addition, it includes a free 90-day adjustment policy, which provides that Cummins Inc. will make minor adjustments to your new generator set during the first three months you own it - free of charge!



WARNING:

Do not use this generator set on a boat. Such use may violate U.S. Coast Guard regulations, and can result in severe personal injury or death from fire, explosion, electrocution, or carbon monoxide poisoning.



WARNING:

Back feed to a utility system can cause electrocution and/or property damage. Do not connect to any building electrical except through an approved device or after building main breaker is open.

After Sale Support

Largest Distributor/Dealer Support Network

Cummins Onan generator sets are supported by the largest and best trained worldwide certified distributor/dealer network in the industry. This network of knowledgeable Cummins Onan distributor/dealers will help you select and install the right generator set and accessories to meet the requirements of your specific application. This same network offers a complete selection of commonly used generator set maintenance parts, accessories and products plus manuals and specification sheets. Plus, they can answer your questions regarding proper operation, maintenance schedules and more.

Manuals: Operation and installation manuals ship with the generator set. To obtain additional copies or other manuals for this model, see your Cummins Onan distributor/dealer and request the following manual numbers: Operation (981- 0167), Installation (981-0634), Parts (981-0273), Service (981-0535).

To easily locate the nearest Cummins Onan distributor/dealer in your area, or for more information, contact us at 1-800-888-6626 (or 763-574-5000), or visit www.cumminsonan.com.

Contact your distributor/dealer for more information

Cummins Onan

Cummins Power Generation

1400 73rd Ave. NE
Minneapolis, MN 55432 USA
Phone 1 763 574 5000
Toll-free 1 800 888 6626
Fax 1 763 574 5298
Email www.cumminsonan.com/contact
www.cumminsonan.com

